



**TECHNIMOUNT**  
EMS™



## **BRACKET PRO SERIE® 120 - GR3**

MOUNTING SYSTEM FOR GROUND TRANSPORT  
OF BAXTER SIGMA SPECTRUM INFUSION PUMPS

### **SAFETY AND FLEXIBILITY WHERE IT MATTERS MOST**

The Bracket Pro Serie 120-GR3 is designed to securely support up to three Baxter SIGMA Spectrum Infusion pumps during ground EMS and Critical Care Transport.

This solution can be easily installed and transferred between different configurations. The Bracket Pro Serie 120-GR3 is tested in compliance with SAE J3043, the highest industry safety standards for transport of medical equipment.

At Technimount EMS, we understand that EMS and Critical Care Transport teams need solutions that they can rely on. We design and develop quality mounting systems which are safe and flexible, allowing you to concentrate on what matters most - patient care.



# BRACKET PRO SERIE® 120 - GR3

## POTENTIAL CONFIGURATIONS

Safety MD Transporter™



Neonatal Stretcher System  
(Vertical Mounting System)

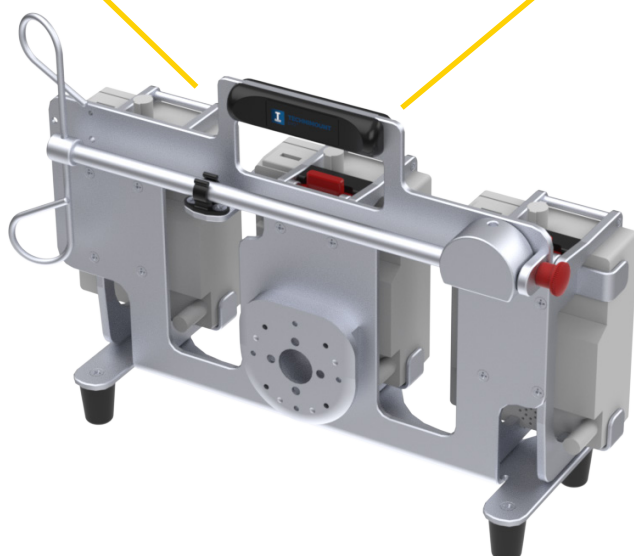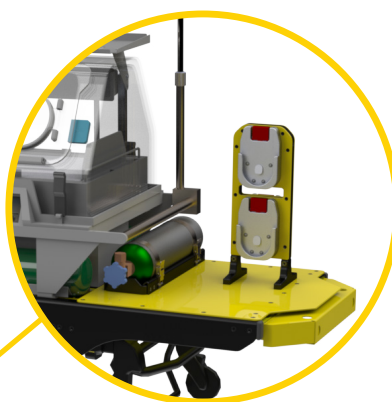


Note: Product may vary from images shown

# TECHNICAL SPECIFICATIONS

Product Name	Bracket Pro Serie® 120 - GR3
Description	Bracket mounting solution to securely transport up to three SIGMA Spectrum Infusion pumps during intra and inter-hospital transport
Part Number	1500-10-BXSGM-GR3
Features	<ul style="list-style-type: none"><li>- Robust mounting solution for EMS/CCT</li><li>- Access to all connectors and accessories</li><li>- Quick release mechanism for easy installation and removal of the pumps</li></ul>
Operating Environment	EMS/CCT (Ground) - Hospital/Clinic, Military
Compliance	Tested in compliance with SAE J3043 and AMD 028
Compatible Mounting System	Compatible with Technimount's: <ul style="list-style-type: none"><li>- Safety MD-Transporter (vertical)</li><li>- Vertical Mounting System</li></ul>
Dimensions (W x D x H)	16.05 in. x 5 in. x 10.7 in. (40.77 cm x 12.7 cm x 27.18 cm)
Weight	5.07 lb. (2.3 kg)
Composition	<ul style="list-style-type: none"><li>- Main assembly: Aluminum 6061-T6, silver anodized finish</li><li>- Anti-Rotation Micro-Disc: Aluminum 6061-T6, silver anodized finish</li><li>- IV Pole: Aluminum 6061-T6, silver anodized finish</li><li>- IV Pole Hooks: Stainless Steel</li></ul>
Operating Temperature	- 35° C to 45° C (31° F to 113° F)
Installation	Device retained on main assembly with red quick release mechanism
Model & Configuration Options	Contact Customer Service at <a href="mailto:customerservice@technimount.com">customerservice@technimount.com</a> .

\* Product and medical device manufacturer names are Trademarks™ or Registered Trademarks® or their respective holders. Technimount does not have a commercial relationship with there manufacturers.

# YOUR SAFETY IS OUR PRIORITY

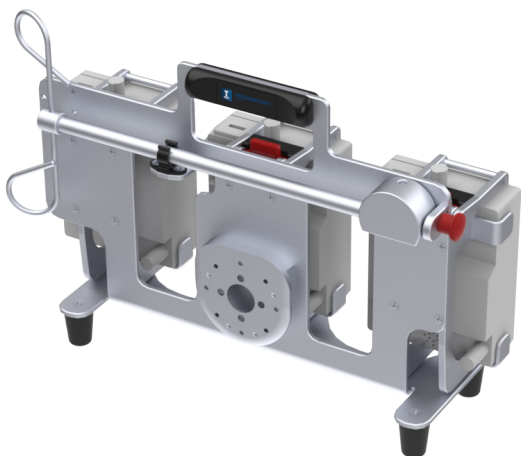


## FEATURES

- ✓ Anti-rotation micro disc to support different mounting configurations.
- ✓ Main assembly with a red quick release mechanism for each pump.
- ✓ IV pole made of high-density aluminum with silver anodized finish.
- ✓ Sturdy, integrated feet under the bracket.
- ✓ Tested in compliance with SAE J3043, the highest industry safety standards for the transport of medical devices.

## BENEFITS

- + Increases flexibility in EMS/CCT practices with multiple configuration options for ground ambulances.
- + Easy installation and removal of the medical device for improved care delivery.
- + Enables a continuum of care for use during temporary transfer from bed to stretcher.
- + Improves ergonomics and protocol flexibility.
- + Reduces risks of damage to the equipment and injuries to patient and personnel during transport.

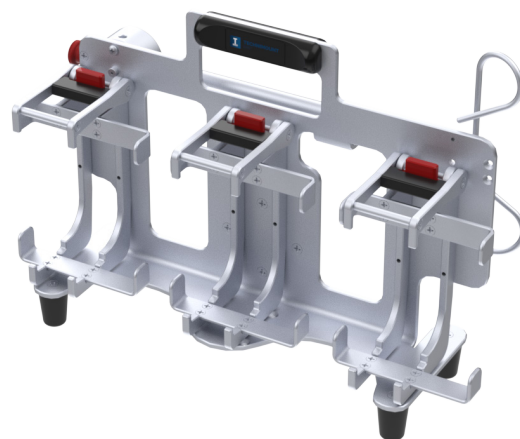

**SAFETY AND FLEXIBILITY  
WHERE IT MATTERS MOST**

**technimount.com**